

SPEEDY



With **DM-21/11peedy** it is possible to mix and pump cement mortars with a maximum grain size 3 mm continuously.

Applicatins and areas of use:

Used successfully in civil engineering, slopes, passive and active anchors, self- drilling anchors, micropiles, back filling, tunneling.

The frame is galvanized and guarantee aptimum corrosion protection.

The motor reverse function of Speedy allows unclogging pump body in case of blockage.


Speedy can be loaded from sacks or directly fitted to the silo by means of a plate.

TECHNICAL SPECIFICATION

DESCRIPTION		DESCRIPTION	
Delivery rate 20-39-45-60-lt/min	20-39-45-60-lt/min	Loading Height	100 cm
Delivery distance	60 mt	Total Height	115 cm
Delivery pressure	40 bar approx.	Width	70 cm
Electric motor	5.5 kw	Length	160 cm
Electric supply	400 V, 50 Hz	Weight	180 kg
Water pump	1.5 kw	Max grain size	3 mm



TECHNICAL SPECIFICATION AND FEATURE

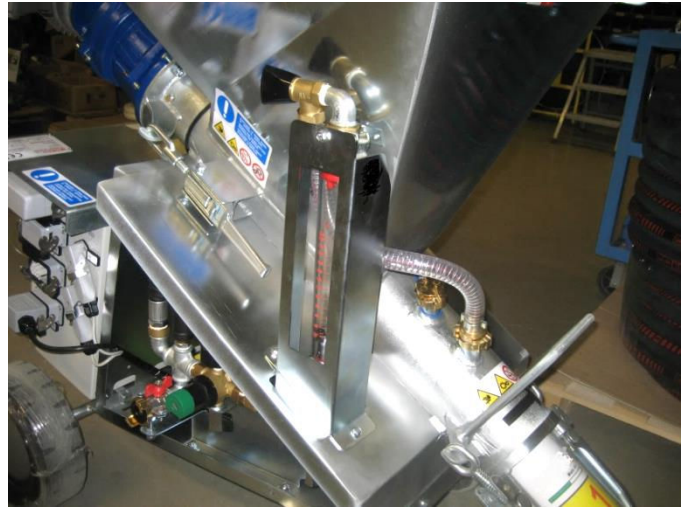

Standard equipment:

- Water pump
- Mt 22 cable with control button
- Mt 20 grout tube diam.35 mm
- Pressure discharge valve
- Standard key case
- Use and maintenance manual
- Spare parts manual
- Automatic polarity control

Optional :- Vibrator

- Plate For silo
- Humidity Probe
- Digital water flow meter



MI105 stator	pressure max	bar	40	Lt/h	1320
MI106 rotor					
MI034 stator	pressure max	bar	40	Lt/h	2340
MI035 rotor					
MI107 stator	pressure max	bar	40	Lt/h	2700
MI108 rotor					
MI030 stator	pressure max	bar	35	Lt/h	3600
MI031 rotor					

DAI PRA' SRL

Via A.Volta, 37- 35010 Villafranca Padovana (PD)

Tel +39 049 767973 – fax +39 049 767192 e-mail commerciale@daipra.it

sito www.daipra.it

P.I.-C.F. 03658030287 – Iscriz. REA 326633 – C.S. € 10.000 I.V.